

High Pressure Stage Casing Pumps

ME

Applications

For pumping feedwater in energy generation plants. This design is ideal for applications in thermal power stations.

Operating data

6 Sizes	NB	3 to 8 in. (80 to 200)
Capacities	Q	upto 4400 Us.gpm (1000 m ³ / h)
Heads	H	up to 11480 ft. (3500 m)
Pump suction pressures	p _s	up to 580 psi. (40 bar)
Pump discharge pres.	p _d	up to 5075 psi. (350 bar)
Liquid temperatures	t	up to 410 °F (210 °C)
Speeds	n	up to 7000 RPM

Design

Horizontal, radially split, multistage, high pressure stage casing pumps with radial single entry impellers. Casings held together by external tiebolts and sealed by metal seals.

Arrangement of pump feet

The pump feet on suction and discharge casing are mounted at shaft centreline.

Bearings

The shaft is supported in bearing housings flanged at each end of the pump. The radial bearing is a force feed oil lubricated plain bearing. The thrust bearing is a tilting pad thrust bearing with spray oil lubrication.

Compensation of axial thrust

The axial thrust caused by the single entry impellers is compensated by a cylindrical balance piston. The residual axial thrust is taken up by the thrust bearing.

Shaft seal

The shaft is sealed by mechanical seals of the Cartridge design.

Installation

Pump and driver on separate or on common baseplate. Steel baseframe of heavy duty welded construction. Pump is driven by steam turbine, electric motor or through variable speed gearbox.

Materials for standard design

Suction casing	Cr-steel
Stage casing	Cr-steel
Discharge casing	Cr-steel
Shaft seal housing	Cr-steel
Diffusers	Cr-steel
Impellers	Cr-steel
Wear ring stationary	Cr-steel
Interstage bushes	Cr-steel
Shaft	Cr-steel
Shaft sleeves	Cr-steel, Cr Ni Mo-steel
Bearing housing	Ductile iron, C-steel

High Pressure Stage Casing Pumps ME

Modern perfected feed pump technology – economic, reliable, efficient

Easy servicing

- Easy disassembly of thrust bearing and balance piston by means of a manual oil pump.
- Mechanical seals of the Cartridge design
- Exchangeable wear rings and stage bushes of approved material combinations

Heavy-duty discharge casing

- reliable design due to finite element calculation
- of solid, at least 12% chrome steel

Economic operating

- Optimum selection is possible due to a large performance range
- Suitable clearances guarantee constant high efficiencies, even after long running times

Robust rotor for speeds up to 7000 rev / min


- High stage pressures, reduced number of stages
- Permits advantageous specific speeds

Metal casing seal

- Safe sealing of casing even in case of very high pressures and temperatures

Mechanical seals of the Cartridge design

- For rapid and easy assembly and disassembly
- Mechanical seals requiring less maintenance, made of highly wear resistant materials
- With a pumping ring independent of the direction of rotation

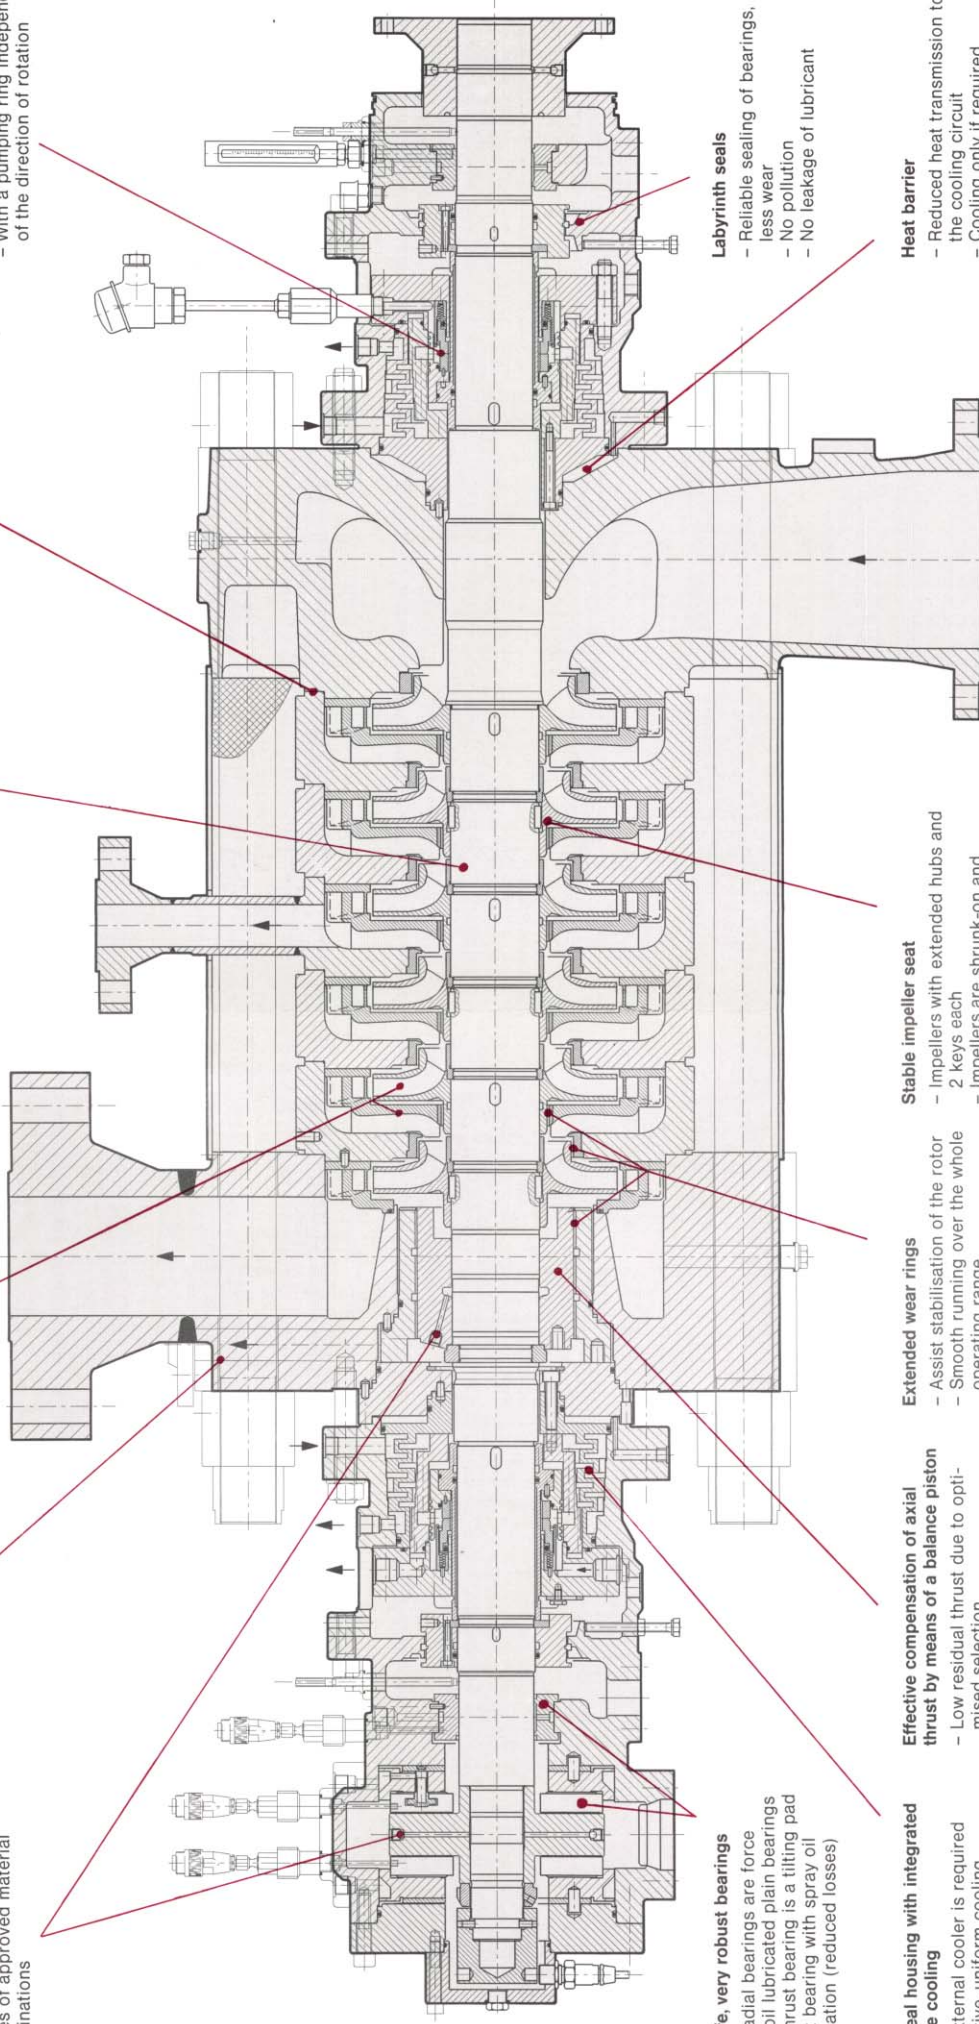

Long-life, very robust bearings

- The radial bearings are force feed oil lubricated plain bearings
- The thrust bearing is a tilting pad thrust bearing with spray oil lubrication (reduced losses)

Shaft seal housing with integrated effective cooling

- No external cooler is required
- Effective, uniform cooling
- Uncomplicated layout of lines, less space required

Effective compensation of axial thrust by means of a balance piston

- Low residual thrust due to optimised selection
- Both shaft seals are subject to suction pressure
- Reliable, even under extremely arduous operating conditions

Extended wear rings

- Assist stabilisation of the rotor
- Smooth running over the whole operating range

Stable impeller seat

- Impellers with extended hubs and 2 keys each
- Impellers are shrunk-on and depending on size individually supported by means of a split ring

Labyrinth seals

- Reliable sealing of bearings, less wear
- No pollution
- No leakage of lubricant

Heat barrier

- Reduced heat transmission to the cooling circuit
- Cooling only if required

SULZER PUMP DIVISION

WORLD HEADQUARTERS

Sulzer Brothers Limited
Pump Division
CH-8401 Winterthur
Switzerland
Telephone 052-81 11 22
Telex 896 060 40 szch
Telefax 052-22 54 01

SUBSIDIARIES AND JOINT VENTURES

EUROPE

**FEDERAL REPUBLIC
OF GERMANY**
Sulzer Weise GmbH
P.O. Box 24 40
D-7520 Bruchsal
Telephone 0 72 51-76-0
Telex 7 822 207
Telefax 0 72 51-7 63 29

FRANCE
Compagnie de Construction
Mécanique Sulzer
Boîte postale 1055
F-78202 Mantes-la-Jolie-Cedex
Telephone 1-34 77 70 00
Telex ccmf 696 922f
Telefax 1-34 777 198

GREAT BRITAIN
Sulzer (UK) Pumps Ltd.
Manor Mill Lane
GB-Leeds LS 11 8BR
Telephone 0532-70 12 44
Telex 55471 sulzer g
Telefax 0532-77 23 97

NETHERLANDS
Sulzer Pompen Benelux B.V.
Postbus 78
NL-7550 AB Hengelo
Telephone 074-43 99 22
Telex 44041 sulpo nl
Telefax 074-43 05 65

SPAIN
Sulzer España, S.A.
Apartado 14291
28080 Madrid
Telephone 01-571 33 56
Telex 46 728 sulze e
Telefax 01-571 32 72

SWITZERLAND
Sulzer Brothers Limited
Pumps Switzerland
P.O. Box 21
CH-8401 Winterthur
Telephone 052-81 11 22
Telex 896 191 supsch
Telefax 052-36 25 90

NORTH AMERICA

USA, CANADA
Sulzer Bingham Pumps Inc.
2800 N.W. Front Avenue
P.O. Box 10247
Portland, OR 97210
Telephone 503-226 52 00
Telex 360 516 bii ui
Telefax 503-226 52 86

LATIN AMERICA

BRAZIL
Sulzer Bombas e
Compressores S.A.
Caixa postal 8454
01051 São Paulo/SP
Telephone 011-75 220 00
Telex 011-44 470 sulz br
Telefax 011-419 52 32

MEXICO
Sulzer Hermanos S.A. de C.V.
Apartado postal 125-Centro
54700 Cuautitlán Izcalli
Telephone 05-871 00 22
Telex 177 3928 sulz me
Telefax 05-871 10 77

AFRICA

Sulzer Bros. (South Africa) Ltd.
Pump Division
P.O. Box 8297
Elandsfontein 1406/Transvaal
Telephone 011-974 12 45
Telex 7-454 38 sa
Telefax 011-974 57 33

ASIA

INDIA
Khimline Pumps Ltd.*
Kolshet Road
Thane-400 607
Telephone 22-50 13 61
Telex 117 2137 pump in
Telefax 22-202 34 19

* JOINT VENTURE